

1/3" CCD Color Bullet camera (Weatherproof) - Super high Resolution/Ex-view -

Key Features

* Extremely high resolution 560TVL

Used with the latest Sony HQ1 DSP technology, the unit produces an extremely high resolution of 560TVL that is the highest ever in the market at the moment.

* Lens Exchangeable

The smart idea with user friendly housing mechanism make it possible to adapt a wide range of different focal lens. Installer can change the lens with no special skill, very easily without changing the camera in order to fix the exact angle of view and suitable focal distance.

VB21HQX-R 21'-92" AOV(3.6mm,4.3mm,6mm,8mm,12mm,16mm)

* Condensation free

Our weatherproof versions provide a perfect solution for moisture leakage problem against any harsh weather condition. The camera is assembled in a clear vacuum status and further protected to stop moisture or water smearing into the camera under the continuous heating and cooling conditions by the fluctuating sunny and rainy weather.

* Day & Night (Option)

The image is instantly changed from Color to BW at 5 lux (True Color at day and true BW at night). By this function, the horizontal and vertical resolution is greatly improved at night time mode and the low lux performance is improved a lot as well by utilizing the benefit of BW camera.

* Compact Size

Incorporating all innovative features, those are used with 1/3" CCD format and made with the world's smallest size.

* Beautiful design

Our fine craftsmanship reaches not only to the picture quality and compact size but also to the products GD(Good Design). All we manufacture have their own unique face and shape firstly aiming to best fit to the environment decorable to any place.

* Easy Installation

Universal type of mounting structure plus user friendly developed camera design provide a useful way of installation mountable to any place such as on the ceiling, on the wall, on the shelf or at the corner providing adjustable 360 degree of camera angle without permitting any invisible position.

* IR Sensitivity (Option)


Color CCD sensor is responded to IR illumination at night.

* Reverse Polarity protection built in


Option

External Audio with C-Mic

Dimension(mm) & Wiring

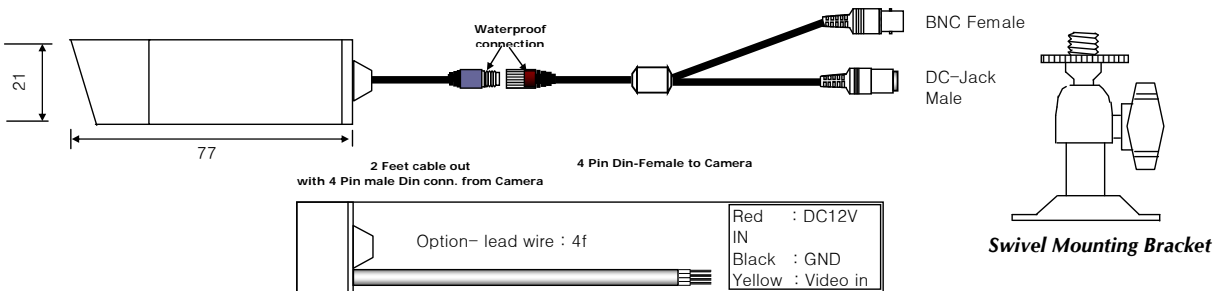

External Audio kit Option

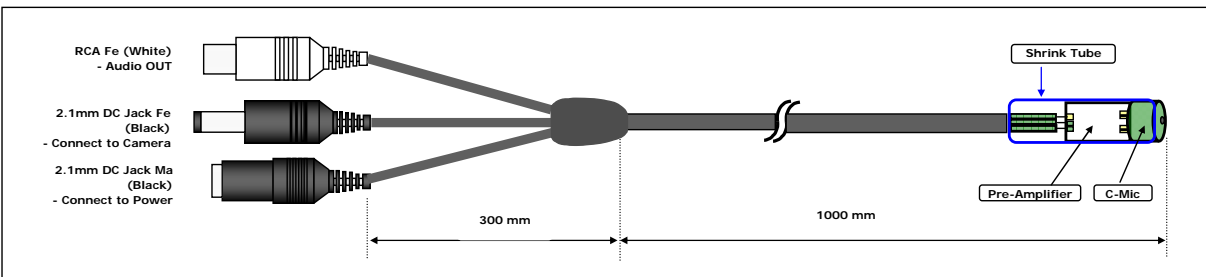

Specification

| MODEL | VB21HQX-R43 |
|-----------------------|--|
| Image sensor | 1/3" Ex-view HAD CCD |
| Effective Pixels | NTSC : 768(H)X494(V) PAL : 752(H)X582(V) |
| Min. Illumination | 0.1Lux at F2.0 |
| H.Resolution | 560TVL |
| Synchronizing system | Internal |
| Scanning system | NTSC 525 Lines PAL 625 Lines |
| Video output | 1.0Vp-p Composite. 75 Ohms |
| S/N ratio | More than 50 dB (AGC Off) |
| Gain Control | 4dB~30dB Auto |
| Gamma correction | r=0.45 |
| Shutter Speed | NTSC : 1/60 ~ 1/100,000 sec PAL : 1/50 ~ 1/100,000 sec |
| White Balance | Automatic(AWB) |
| Smear Effect | 0.005% |
| MTBF | 80,000 hours |
| Lens Standard | 4.3mm(78') |
| Option | 3.6mm, 6mm, 8mm, 12mm, 16mm |
| Power source | 12VDC |
| Operating current | 130mA w/regulated 12VDC in |
| Operating Temperature | 14° F~122° F (-10° C~ + 50° C) |
| Output Terminal | 2ft+4ft waterproof cable with BNC-Female for Video, DC Jack-Male for Power |
| Measurement (mm) | 21(D)x77(L) |
| Weight(Approx.g) | 200 |
| Optional Feature 1 | External Audio with C-Microphone " - 35dB / mV " Reverse(Micro) Image |